



The Proven Leader in Lithium-ion Motive Power Battery

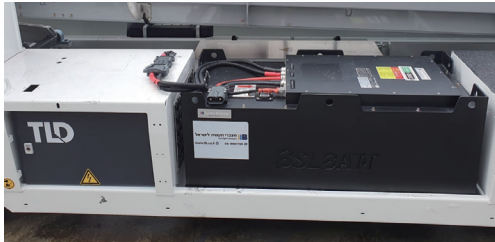

Up to
3,500+ cycle life

Up to
20 years design life

Save up to
70% expenses in 5 years

Standard And
Customizable Battery
Systems For GSE Applications


Pushback Tractors / Belt Loaders / Luggage Tugs - GSE-Pack


Model	Nominal Voltage (V)	Capacity (Ah)	Stored Energy (kWh)	Weight (kg/lbs)	Length(mm/inch)	Width(mm/inch)	Height(mm/inch)
B-LFP48-230MH	51.2	230	11.78	499 (1100)	815 (32.09)	406 (15.98)	500 (16.69)
B-LFP48-280MH	51.2	280	14.34	535 (1180)	907 (35.7)	415 (16.35)	610 (24)
B-LFP48-305MH	51.2	305	15.62	500 (1102)	490 (19.29)	770 (30.31)	495 (19.49)
B-LFP48-460MH	51.2	460	23.55	1256 (2770)	1060 (41.73)	450 (17.72)	555 (21.85)


Model	Nominal Voltage (V)	Capacity (Ah)	Stored Energy (kWh)	Weight (kg/lbs)	Length(mm/inch)	Width(mm/inch)	Height(mm/inch)
B-LFP80-300MH	83.2	300	24.96	555 (1224)	1250 (49.21)	578 (22.76)	580 (22.83)
B-LFP80-410MH	83.2	410	34.11	1213 (2674)	1010 (39.76)	680 (26.77)	655 (25.79)
B-LFP80-460MH	83.2	460	38.27	1700 (3748)	1015 (39.96)	680 (26.77)	795 (31.3)
B-LFP80-560MH	83.2	560	46.59	1480 (3263)	1015 (39.96)	680 (26.77)	795 (31.3)
B-LFP80-615MH	83.2	615	51.17	1500 (3307)	1015 (39.96)	680 (26.77)	795 (31.3)


Charge Temperature Range	32°F to 131°F(0°C to 55°C)
Discharge Temperature Range	-4°F to 131°F(-20°C to 55°C)


*For more lithium batteries request, please contact our sales for support .


Consistent Power 

Fast & Opportunity Charge 

8-Year Warranty Or 12,000 Hours 

Long Life 

Zero Maintenance 

Optional Heating Function 



Facebook



Linkedin



Tiktok



Instagram



Youtube